


$PI=4*(1-1/3+1/5+etc)$
 $ln=2.30258509log10$
 $lnx=(x-1)/x+$
 $((x-1)/x)^2/2+etc$
 $e^x=1+x+x^2/2!+etc$
 $sinx=x-x^3/3!+x^5/5!+etc$
 $cosx=1-x^2/2!+x^4/4!+etc$
 $1/(x-1)=1+x+x^2+x^3+etc$
 Note $0! = 1! = 1$
 $(H+T)^N = \text{sum of all n terms } C_n H^n T^{(n-1)}$
 $C_n = n! / (n!(n-n)!) = 1$
 $e^x = cosx - jsinx$
 $x = b/2^a +/-$
 $(b^2 - 4*a*c)^{1/2} / 2*a$
 area triangle = $(s*(s-a)*(s-b)*(s-c))^{1/2}$
 where $s = (a+b+c)/2$
 integer square $1+3+4 \quad 1+3+5=9 \text{ etc...}$
Permutation
 N draws of M objects
 $P(m/n) = m! / (m-n)!$
 Combinations
 $P(m/n) = n! * C(m/n)$
 Means = $Mx = f(x)/n$
 $Sx = ((n * x^2 - x^2) / n(n-1))^{1/2}$
 $Sy = ((n * y^2 - y^2) / n(n-1))^{1/2}$
 $Syx = ((n * xy - x * y) / n(n-1))^{1/2}$
 Covariance = $Sxy = (n * xy - x * y) / n(n-1)$
 Correlation $R = Sxy^2 / (Sy^2 * Sx^2)$
NORMAL DISTR $f(x) = \frac{1}{\sqrt{2\pi} \sigma} \exp\left(-\frac{(x-\mu)^2}{2\sigma^2}\right)$
 $Q(x) = f(x) \text{ for } 0 < x <$
 $Q(x) = f(x) * (b^2 + b^2 * t^2 + etc)$
 $t = 1 / (1 + r * x)$
 $r = 0.2316419$
 $b1 = 0.31938153$
 $b2 = 0.356563782$
 $b3 = 1.781477937$
 $b4 = 1.821255978$
 $b5 = 1.330274429$
 INVERSE given area find x
 $x = t - fc(t) / fd(t)$
 $c0 = 2.515517$
 $c1 = 0.802853$
 $c2 = 0.010328$
 $d0 = 1$
 $d1 = 1.532788$
 $d2 = 0.1892269$
 $d3 = 0.001308$

Hex	Dec	Char	Hex	Dec	Char	Hex	Dec	Char	Hex	Dec	Char
00	00	NUL	20	32	space	40	64	@	60	96	`
01	01	SOH	21	33	!	41	65	A	61	97	a
02	02	STX	22	34	"	42	66	B	62	98	b
03	03	ETX	23	35	#	43	67	C	63	99	c
04	04	EOT	24	36	\$	44	68	D	64	100	d
05	05	ENQ	25	37	%	45	69	E	65	101	e
06	06	ACK	26	38	&	46	70	F	66	102	f
07	07	EEL	27	39	'	47	71	G	67	103	g
08	08	BS	28	40	(48	72	H	68	104	h
09	09	HT	29	41	(49	73	I	69	105	i
GA	10	L	2A	42	*	4A	74	J	6A	106	j
OB	11	VT	2B	43	+	4B	75	K	6B	107	k
GC	12	FF	2C	44	,	4C	76	L	6C	108	l
OD	13	CR	2D	45	-	4D	77	M	6D	109	m
GE	14	SO	2E	46	.	4E	78	N	6E	110	n
OF	15	SI	2F	47	/	4F	79	O	6F	111	o
10	16	DLE	30	48	0	50	80	P	70	112	p
11	17	DC1	31	49	1	51	81	Q	71	113	q
12	18	DC2	32	50	2	52	82	R	72	114	r
13	19	DC3	33	51	3	53	83	S	73	115	s
14	20	DC4	34	52	4	54	84	T	74	116	t
15	21	NAK	35	53	5	55	85	U	75	117	u
16	22	SYN	36	54	6	56	86	V	76	118	v
17	23	ETB	37	55	7	57	87	W	77	119	w
18	24	CAN	38	56	8	58	88	X	78	120	x
19	25	EM	39	57	9	59	89	Y	79	121	y
1A	26	SUB	3A	58	:	5A	90	Z	7A	122	z
1E	27	ESC	3B	59	;	5B	91	[7B	123	{
1C	28	FS	3C	60	<	5C	92	\	7C	124	
1D	29	GS	3D	61	=	5D	93]	7D	125	}
1E	30	RS	3E	62	>	5E	94	^	7E	126	~
1F	31	US	3F	63	?	5F	95	_	7F	127	DE
NUL Null			DLE Data Link Escape								
SOH Startof Heading			DC1 Device Control 1								
STX Start of Text			DC2 Device Control 2								
ETX End of Text			DC3 Device Control 3								
EOT End of Transmission			DC4 Device Control 4								
ENQ Enquiry			EM End of Medium								
ACK Acknowledge			SUB Substitute								
BEL Bell			ESC Escape								
BS BackSpace			FS File Separator								
HT Horizontal Tab			GS Group Separator								
LF Line Feed			RS Recorder Separator								
VT Vertical Tab			US Unit Separator								
FF Form Feed			DEL Delete								
CR Carriage Return											
SO Shift Out											
SI Shift In											
NAK Negative Acknowledge											
SYN Synchronous Idle											
ETB End of Transmission Block											
CAN Cancel											

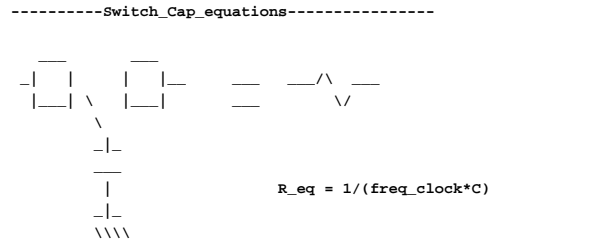

If you assume the switches have a On resistance of Ron, the maximum bandwidth of the RC should be..

$BW = 1 / (2 * PI * Ron * C)$

Since this is a much higher frequency than the clock, the thermal noise due to Ron should be aliased back to base frequency by this amount.

Alias_num = $[1 / (2 * PI * Ron * C)] / [freq_clock]$

Total_alias_noise_Power_1 = $4 * K * T * Ron * d_freq * Alias_num$

Since this switching happen twice the Ron should add the same amount of noise each switch time. The new total should now be.

$= 4 * K * T * Ron * d_freq * (1 / PI * Ron) * (1 / (freq_clock * C))$

Total_alias_noise_Power = $4 * K * T * d_freq * (1 / PI) * (R_eq)$

This says that this noise voltage should be about 4dB below what it should be if R_eq where a simple resistor.

Given that the real noise contained in a single pole lowpass filtered has really 2.46 dB more noise than is defined by the 3dB bandwidth, the switch on resistance noise which is alias to the base band frequency is becoming much closer.